


4528ND

1" Neodymium high Frequency Compression Driver and Waveguide 90° x 60°

1" Neo Compression Drivers

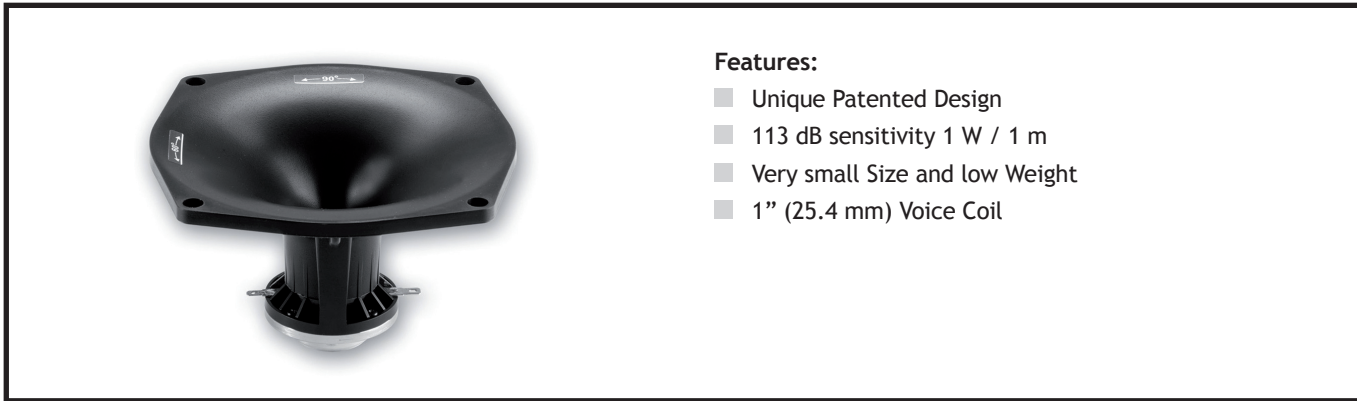

Features:



- Unique Patented Design
- 113 dB sensitivity 1 W / 1 m
- Very small Size and low Weight
- 1" (25.4 mm) Voice Coil

SPECIFICATIONS

Nominal impedance	8 Ohm
Power capacity (AES)	25 W
Peak Power	200 W
Sensitivity 1W/1m	113 dB
Maximal SPL (cont.)	124 dB at 25W
Frequency range	1200 - 30000 Hz
Recommended crossover	1800 Hz
Voice coil diameter	1" (25.4 mm)
Magnet material	Neodymium
Flux density (Tesla)	1.6
Voice coil material	Copper clad aluminum
Voice coil former	Kapton
Diaphragm material	Polyester

MOUNTING INFORMATION

Overall diameter	mm	187 x 162
Depth	mm	101
Net weight	kg	0.64
4 x M5 holes,	90°	on 172 mm diameter

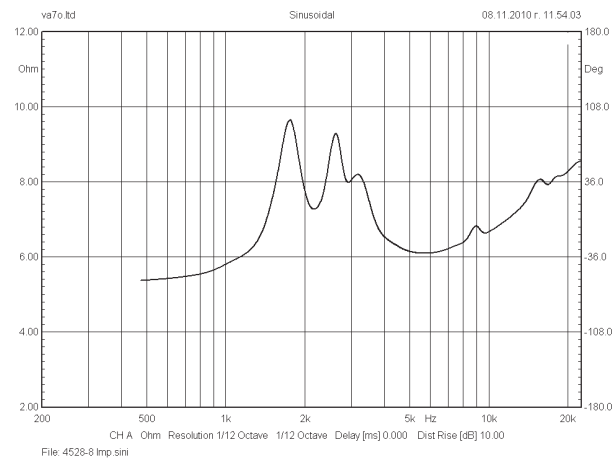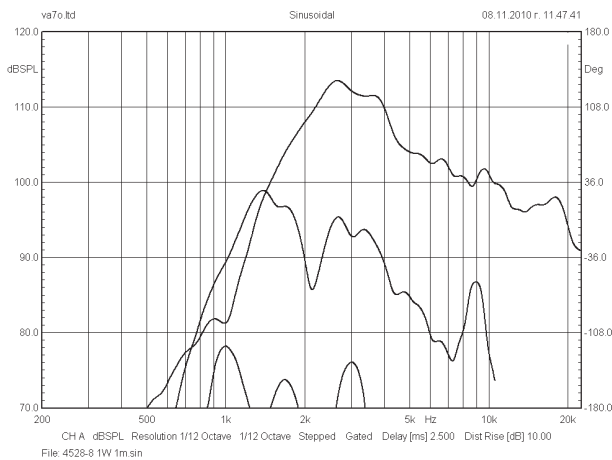

Neodymium Compression Drivers